
ET-1301 ECORAIN 1" (25mm) CELL SPECIFICATION SHEET



F AND STREET		- 10	All Control
	Standard Used	Metric	Imperial
Width	Maria I	1000mm	39.37"
Length		1200mm	47.24"
Height		25mm	1.0′
Surface & Storage Area	Militair	80% void	
Material	T. T	100% recycled polypropylene	
Biological & Chemical	THE PERSONAL PROPERTY.	Unaffected by moulds and algae, soil-bourne	
Resistance		chemicals, bacteria and bitumen	
Service Temperature		-30°C to 120°C	-22°F to 248°F
Compressive Strength/		N. A.	P
Ultimate Load	ASTM D1621	±205.56 t/m2	±306.80 psi
Flow Rate per unit width	ASTM D4716	>240 Lt/min	>63.40 gals/min

NOTE: ALL ECORAIN PRODUCTS & SYSTEMS ARE WORLDWIDE PATENT PENDING & DESIGN REGISTERED

Disclaimer: All information provided in this publication is correct to the best knowledge of the company and is given out in good faith. This information is intended only as a general guide, no responsibility can be accepted for any errors, omissions or incorrect assumption. As each project is unique, and as EcoRain Tank Systems and its distributors and agents worldwide have no direct control over the methods employed by the user in specifying, installing, or supervising of its products hence EcoRain Tank Systems and its distributors and agents worldwide accept no responsibility. Users should satisfy themselves as to the suitability of the product for their purpose. All product designs and specification are subject to change without further notice.

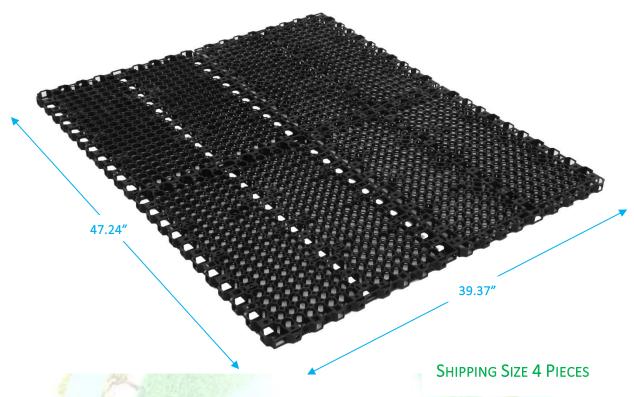

EcoRain Tank Systems of America, Inc.

contact@ecoraintank.com + 1.818.501.0424 www.ecoraintank.com